


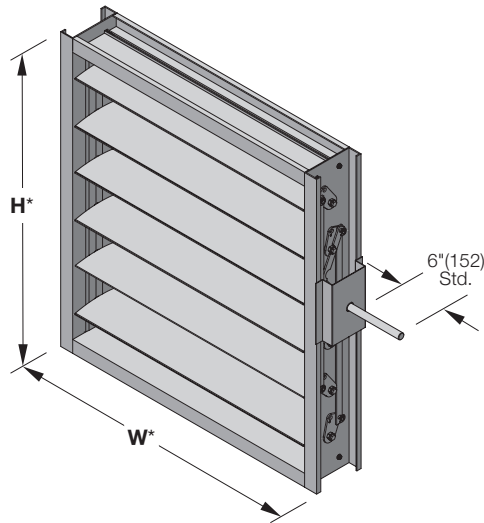

AC-54

(standard)

*Damper dimensions furnished approximately 1/4" (6) undersize. (Drive axle supplied loose for field installation)

AC-53 and AC-54 control dampers employ narrowline aluminum airfoil blades that operate within an aluminum channel frame for automatic air control and manual balancing in low to medium pressure and velocity applications.

Ratings

Damper Width	Maximum System Pressure	Maximum System Velocity
12" (305)	10.0 in. wg. (2.5 kPa)	6,000 fpm (30.5 m/s)
24" (610)	8.4 in. wg. (2.1 kPa)	5,000 fpm (25.4 m/s)
36" (914)	7.0 in. wg. (1.8 kPa)	4,000 fpm (20.3 m/s)
48" (1219)	5.5 in. wg. (1.4 kPa)	3,500 fpm (17.8 m/s)
60" (1524)	3.5 in. wg. (0.9 kPa)	3,000 fpm (15.2 m/s)

Leakage: 7.0 cfm/ft² @ 10.0 in. wg. (0.04 m³/s/ m²@ 2.50 kPa)
6.0 cfm/ft² @ 7.0 in. wg. (0.03 m³/s/ m²@ 1.70 kPa)
4.0 cfm/ft² @ 4.0 in. wg. (0.02 m³/s/ m²@ .90 kPa)

Temperature: -10°F to 150°F (-23°C to 66°C)

Options

■ Factory-installed actuators:

- Manual locking quadrant (supplied loose)
- 24 VAC ■ 120 VAC ■ 230 VAC
- Pneumatic ■ Modulating

■ Factory-installed sleeve ■ Factory-installed side plate

- Gauge: ■ 20 (1.0) ■ 18 (1.3) ■ 16 (1.5) ■ 14(2.0) ■ 10 (3.5)
Length: ■ 12" (305) ■ 16" (406) ■ 24" (610) ■ Other_____

■ Side Plate 12" (305) wide

■ Transitions (sleeve required): ■ Flanged

- Round ■ Oval
- Duct connections: ■ DM-25 ■ DM-35 ■ S & Drive

■ Actuator/Quadrant standoff bracket — accommodates up to 3" (76) thick insulated duct

■ Stainless steel oilite sleeve-type bearings

■ Vertical mounted blades with thrust washers

■ Finish

- Mill ■ Clear Anodized ■ Baked enamel – Gray
- High-performance fluoropolymer – Gray

■ Face and by-pass assemblies:

- Model MDFBR ■ Model MDFBH ■ Model MDFBV

■ Stainless steel linkage:

- 304

Standard Construction

Frame: 4" × 1" × 0.081" minimum (102 × 25 × 2.1) extruded aluminum channel

Blades: 4" (102) heavy gauge dual wall extruded aluminum — airfoil. Parallel (model CD-53) or opposed (model CD-54) action

Axles: 1/2" (13) diameter plated steel hex

Linkage: Concealed in frame

Bearings: Synthetic sleeve-type bearings

Seals: PVC blade edge seals and flexible metal jamb seals

Control Shaft: 1/2" × 6" (13 × 152) drive axle with outboard shaft support bracket and bearing supplied on all dampers for field installation

Minimum Size: Model AC-53 (one blade): 6" × 6" (152 × 152)
Model AC-53 and AC-54 (two blades): 6" × 9" (152 × 229)

Maximum Size: Single Section: 60" × 72" (1524 × 1829)
Multiple sections: 120" (3048) × unlimited height

Typical Damper Dimensional Details

AC-53, AC-54


Control Damper
Narrowline Aluminum Airfoil Blade




AC-53
(Parallel Action)




AC-54
(Opposed Action)

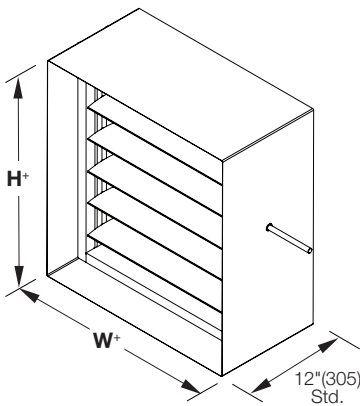


Sleeve (Optional)
*Damper dimensions furnished approximately
1/4" (6) undersize. (sleeve thickness not included)

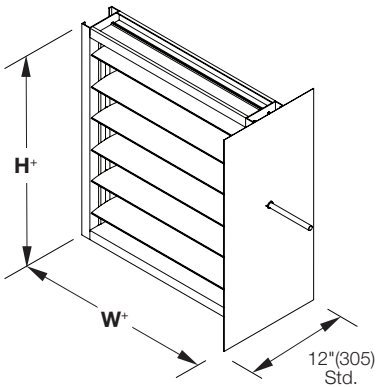


Sideplate (Optional)

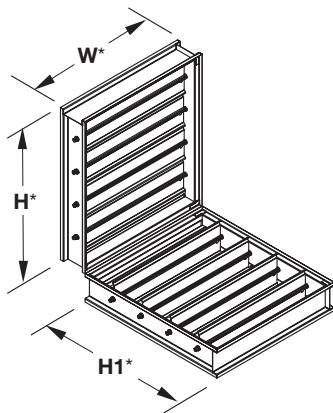

Model **MDFBR**

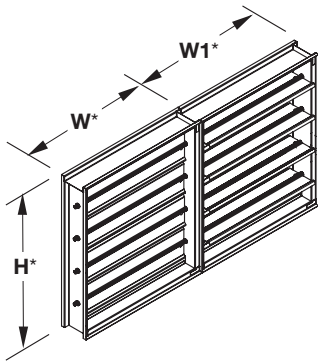

Model **MDFBH**

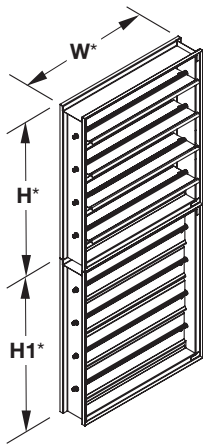


Model **MDFBV**


*Damper dimensions furnished approximately
1/8" (3) undersize.

Airflow Performance Data

Pressure Limitations

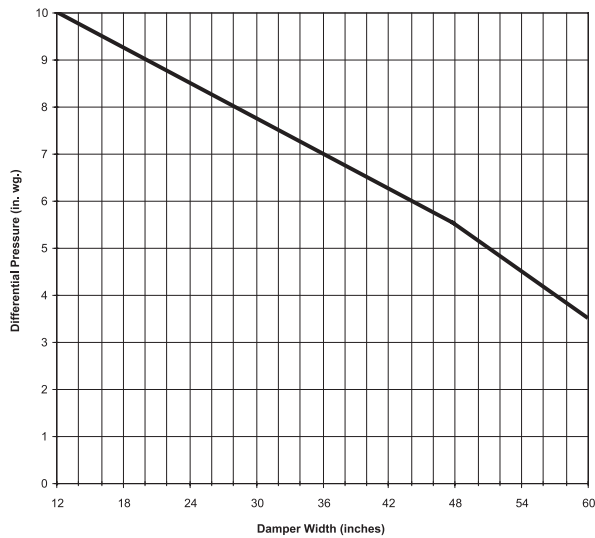

Velocity Limitations

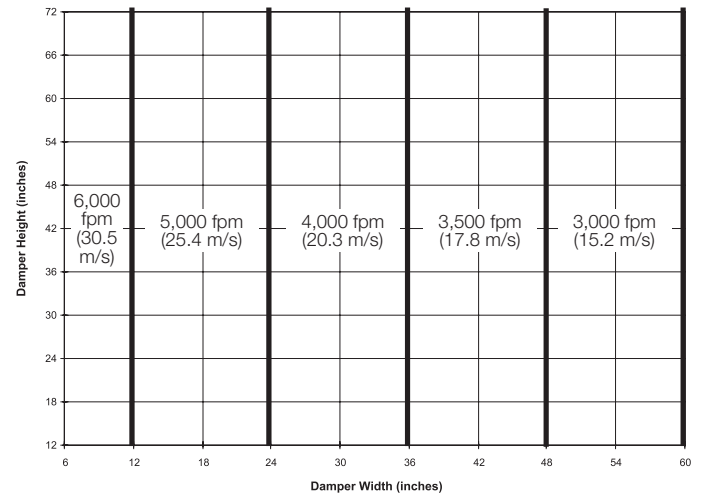

Pressure Loss vs. Velocity

Figure 5.3 — Ducted Inlet and Outlet

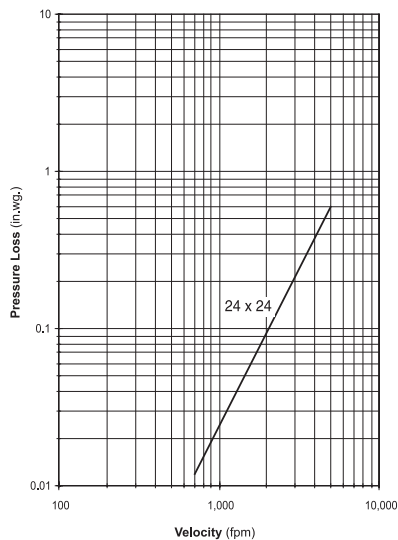


Figure 5.2 — Ducted Inlet



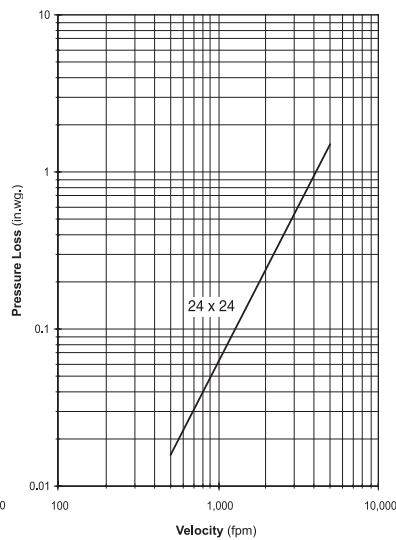


Figure 5.5 — Plenum Mount

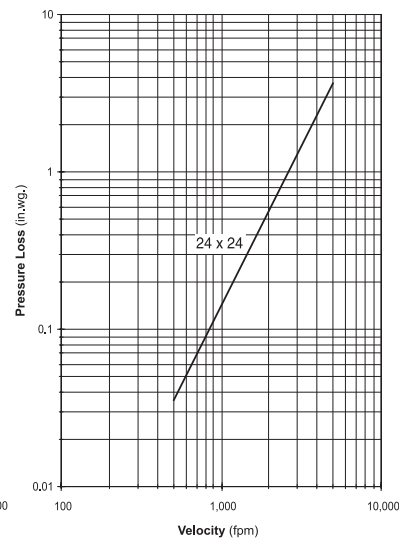


Pressure drop testing was performed in accordance with AMCA Standard 500-D using the three configurations shown. All data has been corrected to represent air density of 0.075 lb./ft. Actual pressure drop in any ducted HVAC system is a combination of many elements. This information, along with analysis of other system influences, should be used to estimate actual pressure losses for a damper installed in a given HVAC system.




Ducted Inlet and Outlet

AMCA Figure 5.3 illustrates a fully ducted damper. This configuration represents the lowest pressure drop of the three test configurations because entrance and exit losses are minimized by straight duct runs upstream and downstream of the damper.



Ducted Inlet

AMCA Figure 5.2 illustrates a ducted damper exhausting air into an open area. This configuration has a lower pressure drop than Figure 5.5 because entrance losses are minimized by a straight duct run upstream of the damper.



Plenum Mount

AMCA Figure 5.5 illustrates a plenum mounted damper. This configuration has the highest pressure drop because of extremely high entrance and exit losses due to the sudden changes of area in the system.