

Factory installed on the rear/ interior of the louver. Available as an optional feature on most louver models or as a stand-alone product which can be retrofitted to existing louvers.

Standard Construction

Material: Aluminum skin over expanded polystyrene fill

Finish: Black

Minimum Size: See appropriate louver minimum

Maximum Size: See appropriate louver maximum

Options

■ **Types:**

- Non-insulated aluminum
- 1" insulated aluminum
- 2" insulated aluminum


■ **Finish:** Black

■ **Partial Opening**


■ **Watertight Enhancement**

Typical Details

Views show typical installation on extruded aluminum louver - formed steel louver similar

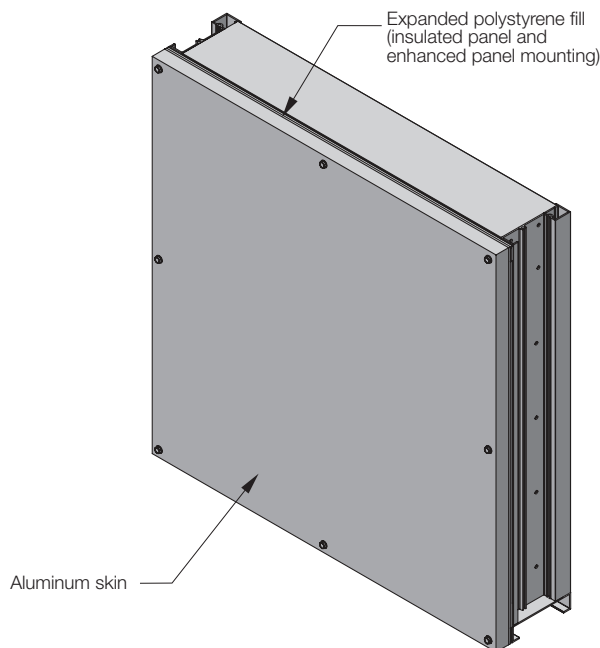


Building Interior View

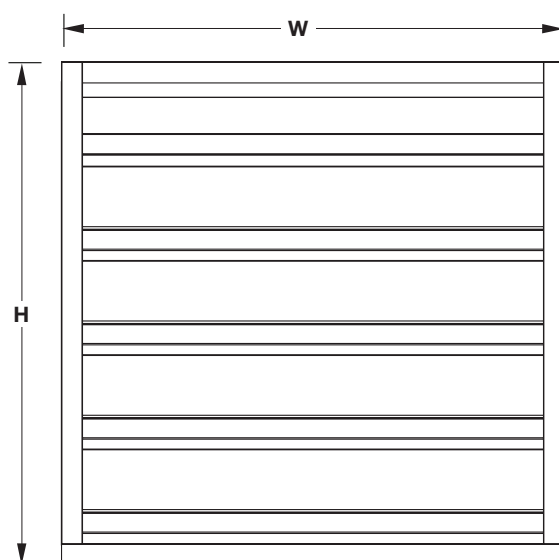


Building Exterior View

1/4" (3)
(gasket & panel combined)

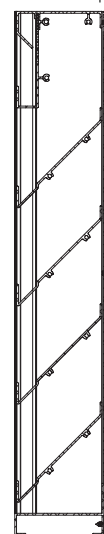


Non-insulated
and gasketed

1" (25)

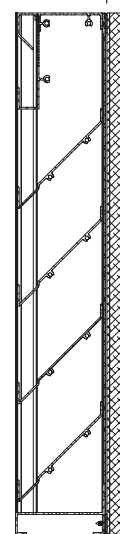

1" Insulated
(4.25 R-value)

2" (50)

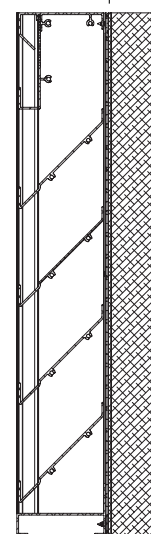

2" Insulated
(8.75 R-value)

Side Views