

Application

Model DMR access doors employ a fully removable dual-panel-door to provide a convenient and economical means to obtain access to components in round ductwork utilized in low, medium, and high pressure and velocity applications.

Standard Construction

Door Panel: 22 ga. (0.85) [20 ga. (1.0) for duct > 14" (356)] galvanized steel – precision stamped.

Gasket: Compressible closed cell neoprene – door panel to duct.

Knobs: Molded polypropylene with metal threaded inserts – hand adjustable.

Minimum Size: 5" Ø (127 Ø)

Maximum Size: 28" Ø (711 Ø)

Options

☐ Insulated construction.


Ratings

UL 94 Flammability Rating: HF1


Maximum System Pressure: + 20" wg. (+5.0 kPa), -10" wg. (-2.5 kPa).

Leakage: None


Temperature: -20°F to 200°F (-29°C to 93°C)

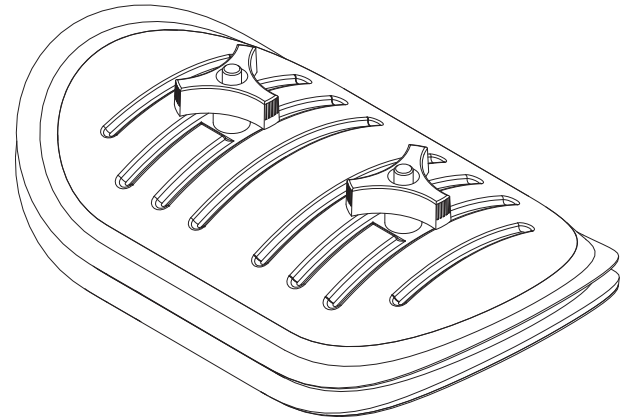

Model **DMR**
(standard)

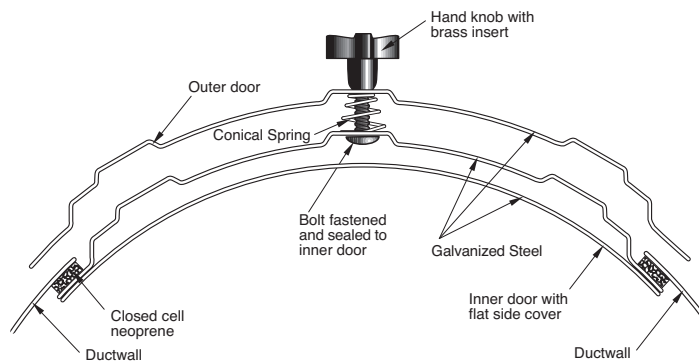

Model **DMR**
(standard construction)

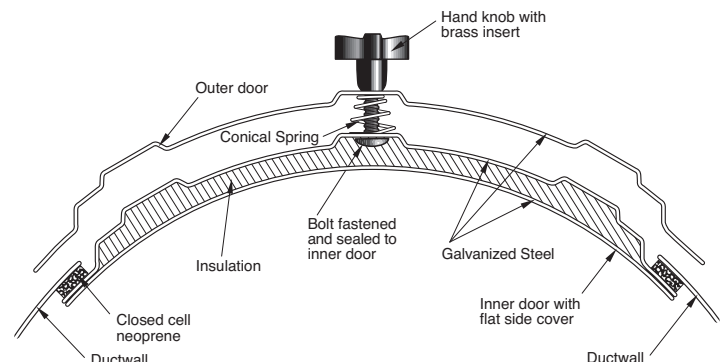

Model **DMR**
(optional insulated construction)

Duct Diameter	Door Panel Size (W x H)
5" (127) ≤ D ≤ 6" (152)	8" x 4" (203 x 102)
7" (178) ≤ D ≤ 9" (229)	8" x 4" (203 x 102)
10" (254) ≤ D ≤ 11" (279)	12" x 8" (305 x 203)
12" (305) ≤ D ≤ 14" (356)	12" x 8" (305 x 203)
15" (381) ≤ D ≤ 16" (406)	16" x 12" (406 x 305)
18" (457) ≤ D ≤ 20" (504)	16" x 12" (406 x 305)
22" (559) ≤ D ≤ 24" (610)	16" x 12" (406 x 305)
26" (660) ≤ D ≤ 28" (711)	16" x 12" (406 x 305)