


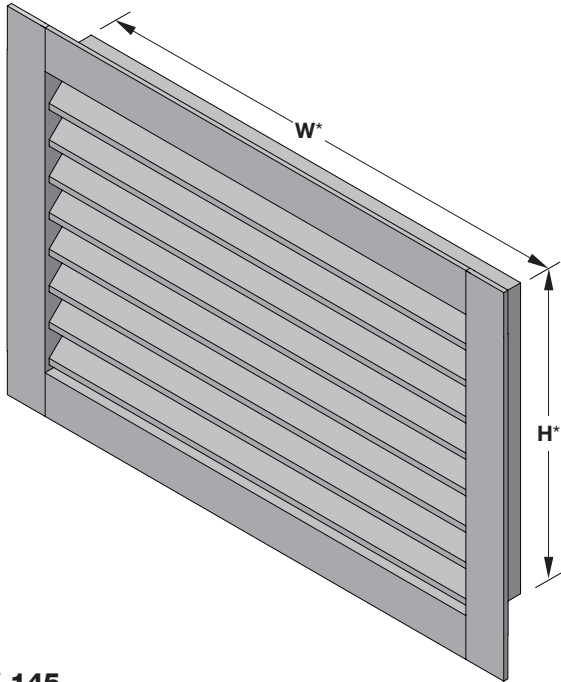

EBV-145

(standard)

*Fastener heads add a combined 1/4" (6) to the ordered width

Standard Sizes (W × H)

8-1/8" × 2-3/8" (216 × 60)	16-1/2" × 2-3/8" (419 × 60)
8-1/8" × 4-3/4" (216 × 121)	16-1/2" × 4-3/4" (419 × 121)
8-1/8" × 7-3/4" (216 × 186)	16-1/2" × 7-3/4" (419 × 186)
12" × 2-3/8" (305 × 60)	16-1/2" × 15-3/4" (419 × 400)
12" × 4-3/4" (305 × 121)	24" × 2-3/8" (610 × 60)
12" × 7-3/4" (305 × 186)	24" × 4-3/4" (610 × 121)
12" × 11-3/4" (305 × 298)	24" × 7-3/4" (610 × 186)
15-5/8" × 7-3/4" (397 × 186)	32" × 7-3/4" (913 × 186)
15-5/8" × 15-3/4" (397 × 400)	48" × 7-3/4" (1219 × 186)

The EBV-145 brick vent is used primarily on renovation projects and incorporates a 1" (25) face flange. Brick vents provide a permanent means of gravity ventilation for crawl spaces, hung ceilings, incinerator rooms, chimney flues, foundations, pipe spaces, and corridors and are not intended to protect against driven rain conditions.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum

Frame: 1-1/2" deep × 0.125" thick (38 × 3) with 1" (25) face flange

Blades: 45° × 0.125" (3) thick J-style

Screen: 18 × 14 mesh aluminum insect screen

Minimum Size: 4" × 2-3/8" (102 × 60)


Maximum Size: 48" × 24" (1219 × 610)

Options


■ Factory finish:

- Polyester Powder
- Baked Enamel
- Clear or Color Anodized, Class 1
- Prime Coat

Attributes

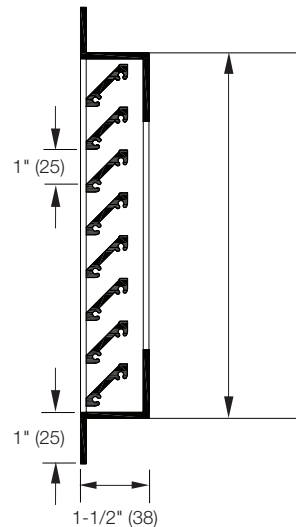

Vertical Section
(Standard)

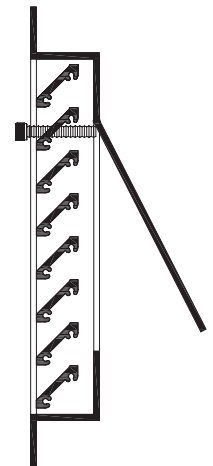

Flap Blade Damper
(Optional)

NOTE: Dimensions in parentheses () are millimeters.
Information is subject to change without notice or obligation.