


A pull chain operator allows operable louvers to be manually operated without the need for an actuator. A pull chain is best suited for louvers installed high up in a wall or in other locations where a standard locking quadrant would be difficult to reach.

The pull chain operator employs a double loop chain with a dual crank arm mounted on a full-width jackshaft. Pulling on one side of the loop opens the blades; pulling on the other side closes them. The pull chain is available as a standard option on most operable and combination louver models.

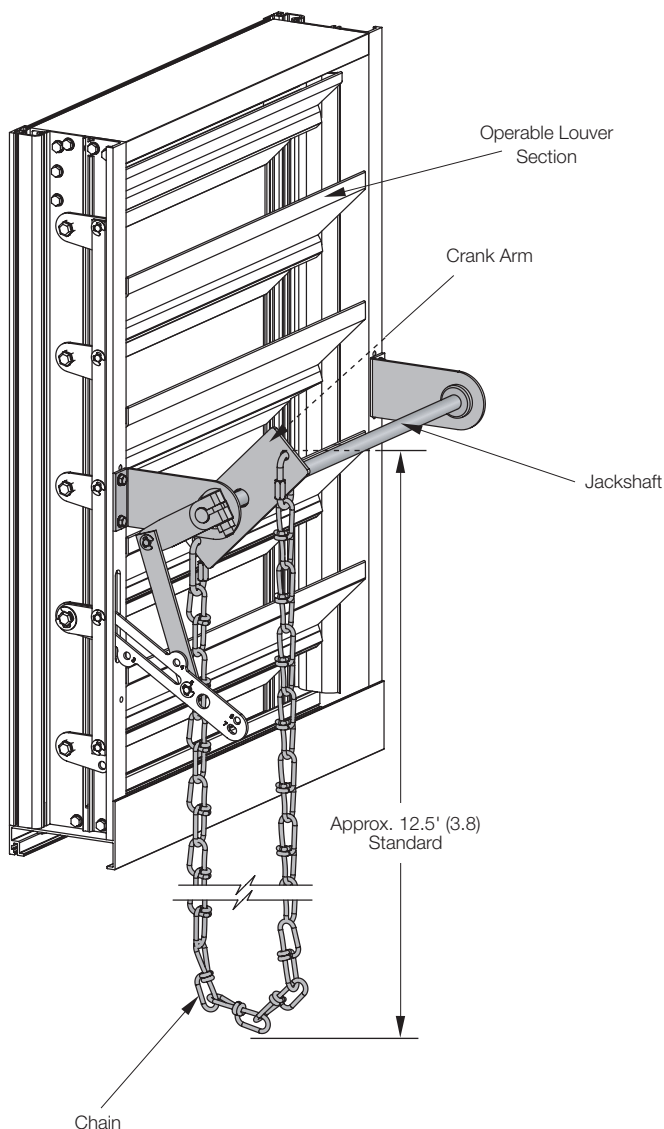

Standard Construction

Material: Galvanized steel

Shaft size: 1/2"

Chain length: 25' (7.6)*

Options

■ **Extended chain length:**

- 50' (15.2) ■ 100' (30.5)

***NOTE:** Because the chain is arranged as a loop, the distance from the bottom of the chain to the louver will be approximately half of the overall chain length.

NOTE: Dimensions in parentheses () are meters. Information is subject to change without notice or obligation.