


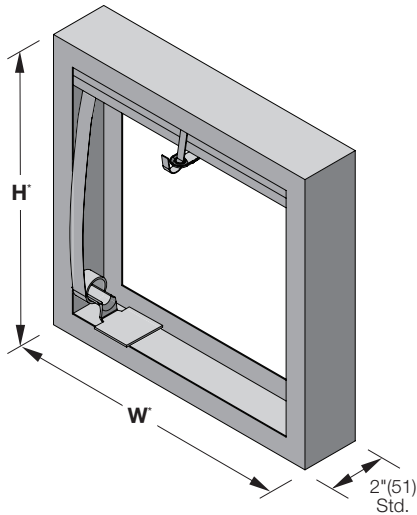

FD-2-A
(standard)

*Damper dimensions furnished approximately 1/4" (6) undersize.

Options

■ Factory-installed sleeve:

Gauge: ■ 20(1.0) ■ 18(1.3) ■ 16(1.6) ■ 14(2.0) ■ 10(3.5)
Length: ■ 12"(305) ■ 16"(406) ■ 24"(610) ■ Other _____

■ Transitions: ■ Flanged (sleeved required)

- Round ■ Oval
- Duct connections (sleeve required):
 - 1"(25) S-clip ■ DM-25 ■ DM-35 ■ WARD

■ Retaining angle system:


Gauge: ■ 20 (1.0) ■ 16 (1.6)
Picture Frame: ■ SSPF (Single-side) ■ DSPF (2-sided)
Individual Angle Set: ■ SS (Single-side) ■ DS (2-sided)

■ Alternate fire closure temperature:

- 212°F (100°C)


■ Duct access door factory mounted in common sleeve

■ Generic mullion for oversized masonry or concrete openings

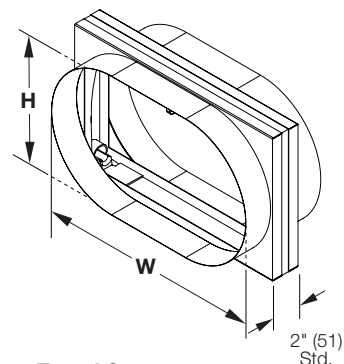


Type AO (Optional)

Oval duct transitions are standard with W and H equal to damper width and height dimensions. (available with W and H smaller than damper width and height)

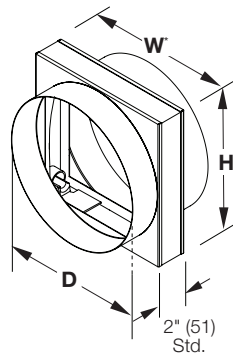


Type AR (Optional)

Round duct transitions are standard with D=W=H. (available with D<W and H)



Sleeve (Optional)

With standard flange
(Typical for use with grille)



Sleeve Type A (Optional)

With standard flange
(Typical for use with grille)

The FD-2-A fire damper employs thinline curtain style blades for point-of-origin control of fire in static HVAC systems. The FD-2-A may be installed in vertical walls or partitions with fire resistance ratings up to 2 hours.

Ratings

UL 555 Fire Resistance Rating: 1-1/2 Hour (vertical)

UL HNLJ.V-5: Ventilation Duct Assemblies

Listings

UL 555 listing: R14981

CAN/ULC S112 listing: R14981

CSFM listing: 3225-1404:101

New York City MEA listing: 295-98-E

Meets NFPA Standards: 90A, 92A, 92B and 101

Meets Building Code Standards: IBC, NBC, NFPA, SBC and UBC



Standard Construction

Frame: 22 gauge (0.85) galvanized steel

Blades: 24 gauge (0.7) galvanized steel – curtain style

Fire Closure Device: Fusible link

Fire Closure Temperature: 165°F (75°C)

Minimum Size: 4" x 4" (102 x 102)

Maximum Size: Single section: Vertical: 36" x 48" (914 x 1219)
Multiple section: Vertical: 36" x 72" (1219 x 1829) or
72" x 36" (1829 x 1219)




NOTE: Dimensions in parentheses () are millimeters.
Information is subject to change without notice or obligation.

*Damper dimensions furnished approximately 1/4" (6) undersize.




Blade Stack Dimensional Data

FD-2-A

1-1/2 Hour Rated – Dynamic Fire Damper
Thinline Curtain Style Blade

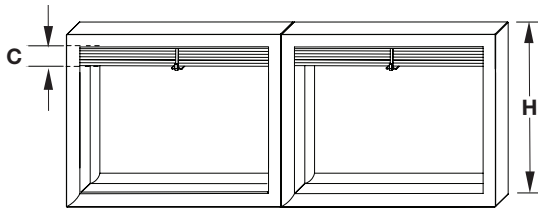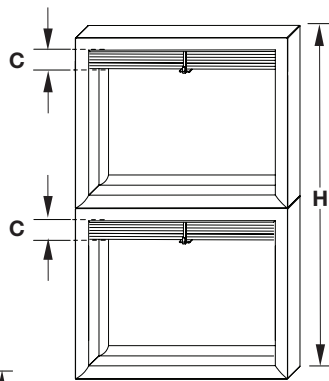

FD-2-A
(standard)

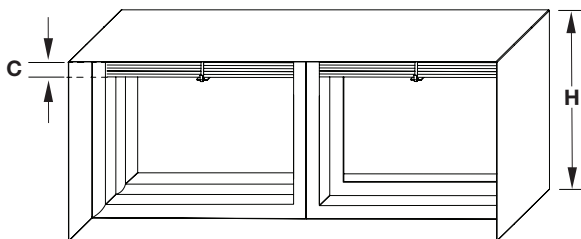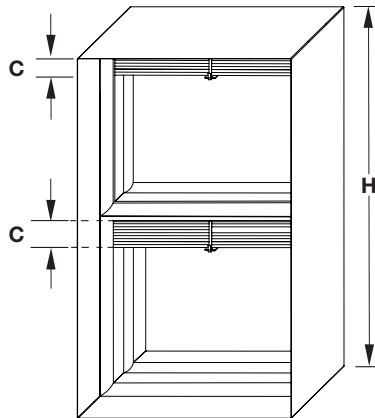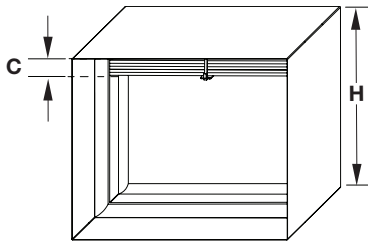

Sleeve Style S (Optional)

Nominal Duct Height 'H'	Blade Stack Height 'C'
4" (102)	2" (51)
5" (127)	2" (51)
6" (152)	2" (51)
7" (178)	2" (51)
8" (203)	2" (51)
9" (229)	2" (51)
10" (254)	2" (51)
11" (279)	3" (76)
12" (305)	3" (76)
13" (330)	3" (76)
14" (356)	3" (76)
15" (381)	4" (102)
16" (406)	4" (102)
17" (432)	4" (102)
18" (457)	4" (102)
19" (483)	4" (102)
20" (508)	5" (127)
21" (533)	5" (127)
22" (559)	5" (127)
23" (584)	5" (127)
24" (610)	5" (127)
25" (635)	6" (152)
26" (660)	6" (152)
27" (686)	6" (152)
28" (711)	6" (152)
29" (737)	6" (152)
30" (762)	6" (152)
31" (787)	6" (152)
32" (813)	7" (178)
33" (838)	7" (178)
34" (864)	7" (178)
35" (889)	7" (178)
36" (914)	7" (178)
37" (940)	8" (203)
38" (965)	8" (203)
39" (991)	8" (203)
40" (1016)	8" (203)
41" (1041)	8" (203)
42" (1067)	8" (203)
43" (1092)	8" (203)
44" (1118)	8" (203)
45" (1143)	8" (203)
46" (1168)	8" (203)
47" (1194)	8" (203)
48" (1219)	8" (203)

Nominal Duct Height 'H'	Blade Stack Height 'C'
48" (1219)	6" (152)
49" (1245)	6" (152)
50" (1270)	6" (152)
51" (1295)	6" (152)
52" (1321)	6" (152)
53" (1346)	6" (152)
54" (1372)	6" (152)
55" (1397)	6" (152)
56" (1422)	6" (152)
57" (1448)	6" (152)
58" (1473)	6" (152)
59" (1499)	7" (178)
60" (1524)	7" (178)
61" (1549)	7" (178)
62" (1575)	7" (178)
63" (1600)	7" (178)
64" (1626)	7" (178)
65" (1651)	7" (178)
66" (1676)	7" (178)
67" (1702)	7" (178)
68" (1727)	7" (178)
69" (1753)	7" (178)
70" (1778)	7" (178)
71" (1803)	7" (178)
72" (1829)	7" (178)