

Application

The HT-401 equipment screen incorporates a horizontal step-blade to match common building cladding systems and screen equipment from line-of-sight. The HT-401 is available in a wide array of finishes including custom color matching.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum.

Frame: 4" × 1½" × 0.081" thick (102 × 38 × 2) angle.

Blades: 0.081" (2) thick airfoil tube style.

Mullion: Concealed.

Minimum Size: 12" × 12" (305 × 305).


Maximum Size: Single section: 60" × 144" (1524 × 3658).
144" × 60" (3658 × 1524).
Multiple section: Unlimited

Options

- ☐ Factory finish:
 - ☐ High Performance Fluoropolymer - 100% resin Newlar®/70% resin Kynar®
 - ☐ Baked Enamel
 - ☐ Clear or Color Anodized, Class 1
 - ☐ Prime Coat
- ☐ Welded construction.
- ☐ Hinged frame.

Ratings

Free Area: [48" × 48" (1219 × 1219) unit]: 9.6 ft² (0.89 m²)
60.0%

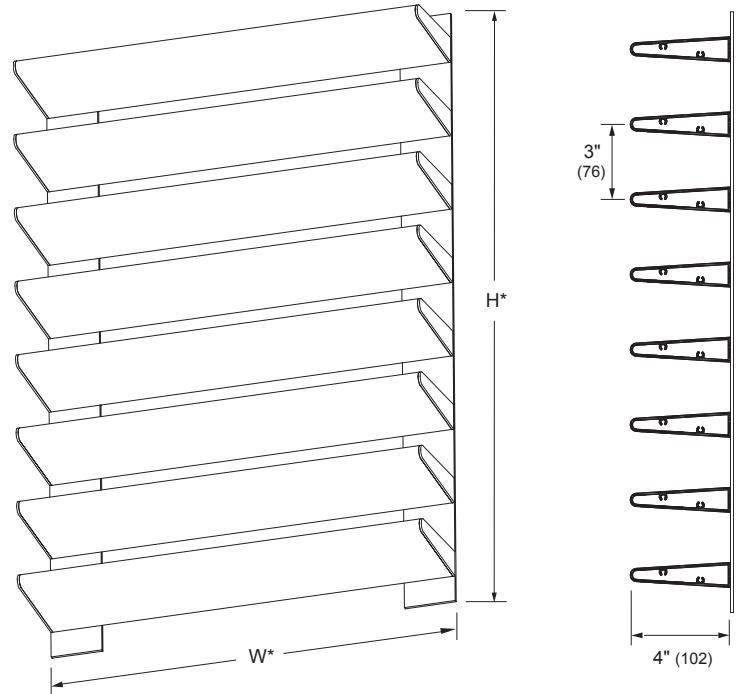


Model **HT-401**

(standard)


*Dimensions furnished
approximately 1/2" (13) undersize.

Vertical Section



Vertical Mullion

(standard)



Horizontal Mullion

(standard)