


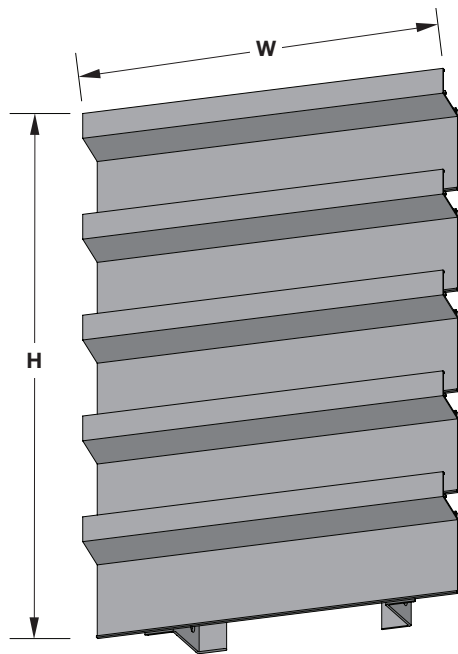

HZ-200
(standard)

The HZ-200 equipment screen employs a unique blade shape designed to offer the visual effect of horizontal cladding, providing an effective and attractive method of hiding equipment and other unsightly building elements from view. The HZ-200 is suitable for both interior and exterior installations, and is available in a wide array of finishes including anodizing and custom color matching.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum

Frame: 3-1/4" × 1-1/2" × 1/8" thick (83 × 38 × 2) angle

Blades: 0.081" (2) thick horizontal cladding style

Mullion: Hidden

Minimum Size: 12" × 10-3/8" (305 × 264)

Maximum Size: Single section: 72" × 144" (1524 × 3658)
144" × 72" (3658 × 1524)
Multiple section: Unlimited

Shipping Weight (approximate): 2.6 lbs/ft² (12.7 kg/m²)

Ratings

Free Area: [48" × 48" (1219 × 1219) unit]: 3.1 ft² (0.29 m²)
19.4%




Design Load: 30 psf

Options


■ Factory finish:

- High Performance Fluoropolymer
- Baked Enamel
- Prime Coat
- Clear Anodize
- Integral Color Anodize


■ Boxed or mitered corners

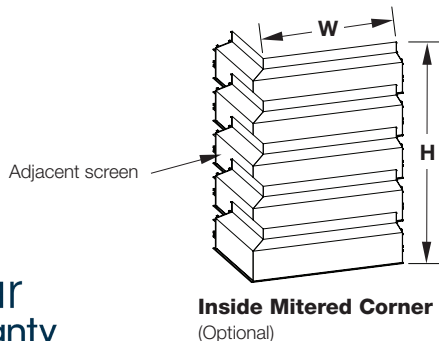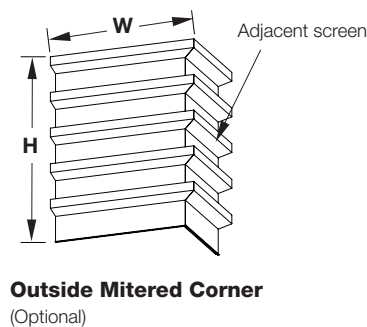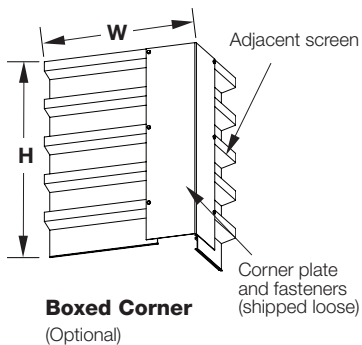


Attributes

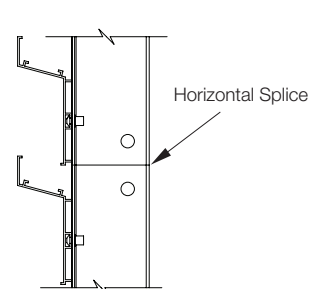

Horizontal Mullion
(Standard)

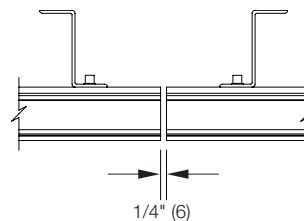

Vertical Mullion
(Standard)

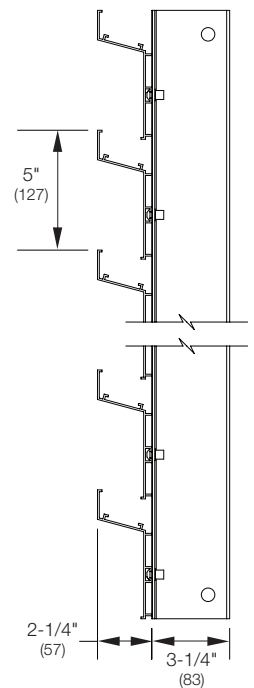

Side View


NOTE: Dimensions in parentheses () are millimeters.
Information is subject to change without notice or obligation.
csairproducts.com




Installation Views

HZ-200


Extruded Aluminum Sight Screen
2-1/4" deep • 45° Horizontal Cladding

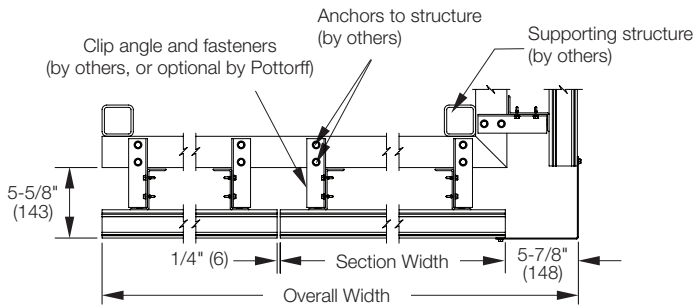


**Generic Plan View -
Boxed Corner**

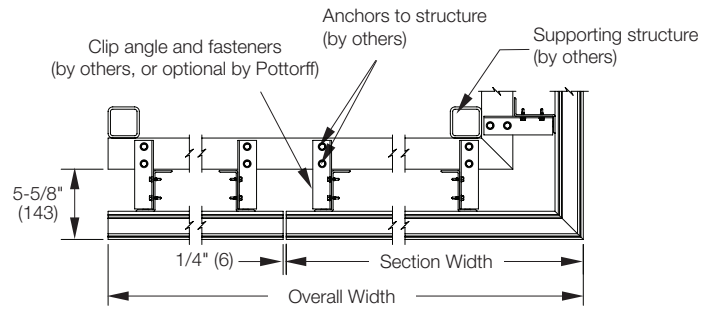

**Generic Plan View -
Outside Mitered Corner**

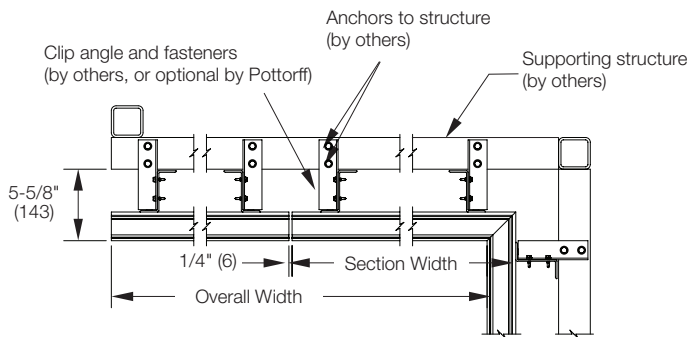

**Generic Plan View -
Inside Mitered Corner**

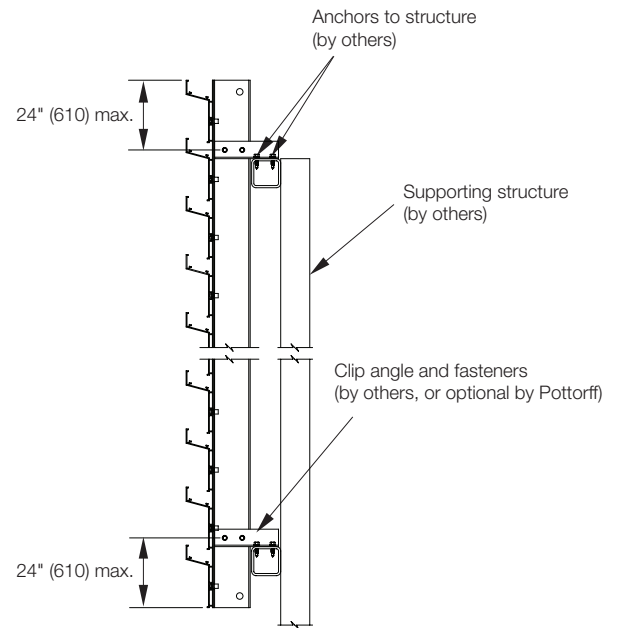

Vertical Section