

Application and Design

2 1/4" wide, 1/8" seam cover to conceal vertical gaps between multi-section assemblies and allow for caulking pre-install.

Standard Construction

Material: 0.1875" (1.5) thick 6063-T5 extruded aluminum for aluminum.

Finish: To match louver finish.

Minimum Size: See appropriate louver minimum.


Maximum Size: See appropriate louver maximum.

Typical Details



Views shown with single end notch typical of some models.

Installation Guide

Steps and views are on back page.

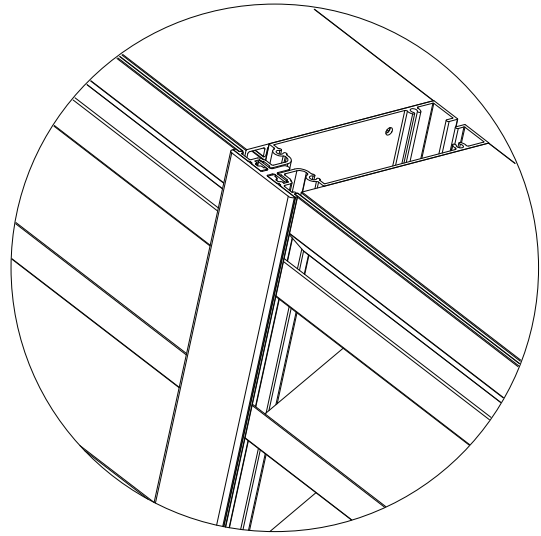


Isometric View

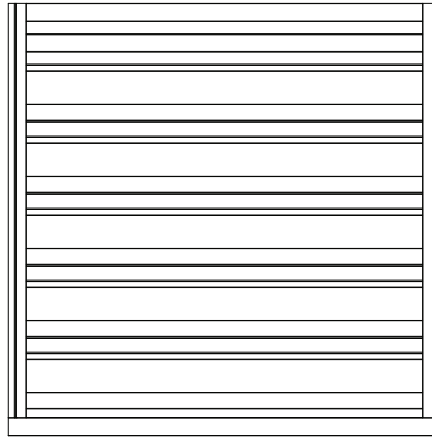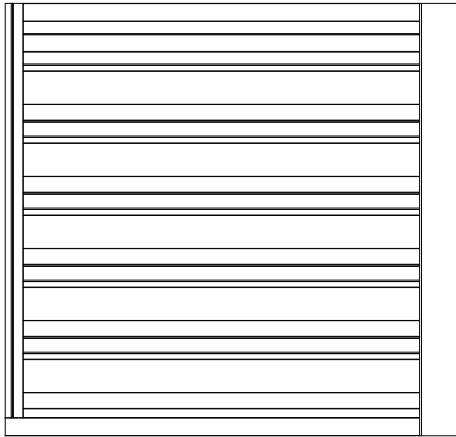

Multi - Front View


Installation Guide

1. Install First Louver

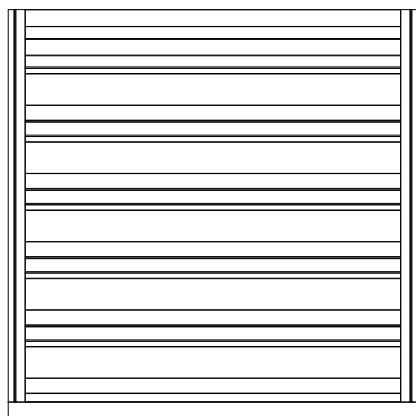


Front View

3. Insert Mullion Cover Into Front Slot

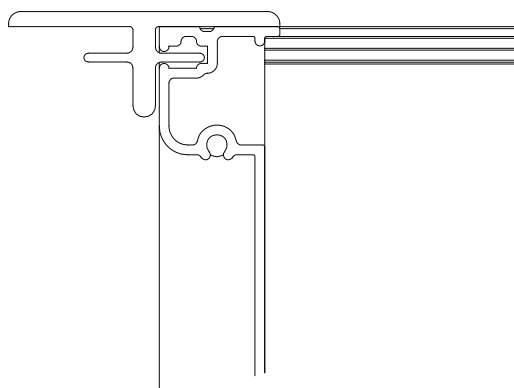

Top View
Showing Front Slot


2. Add Caulking to Mullion Side Channels

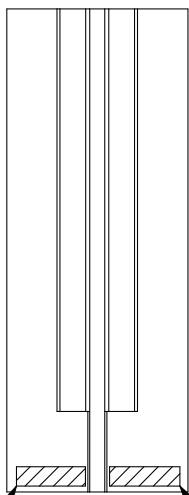

Add Caulking Add Caulking


Caulking View

4. Install and Align Second Louver

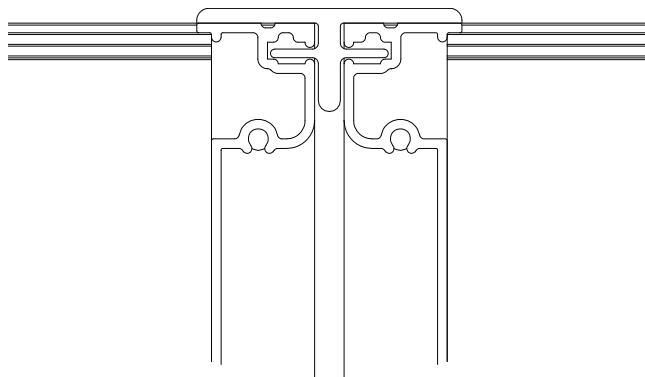


Bottom View

5. Repeat steps 2 thru 4 for all additional sections

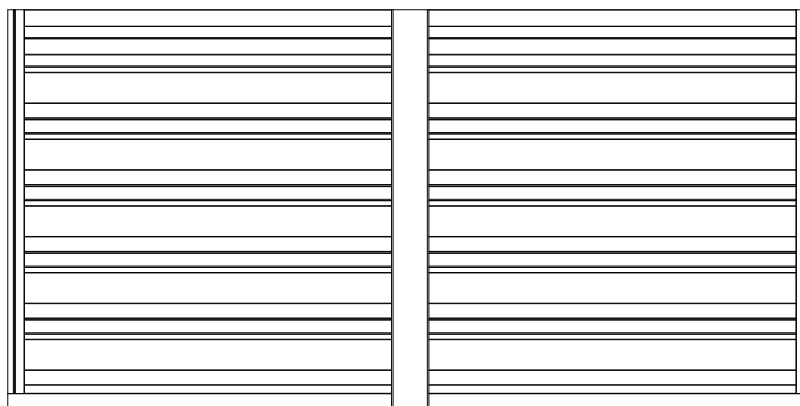

Front View

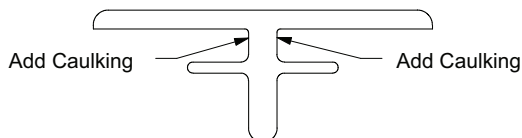

Add Caulking Add Caulking