

Pottorff offers the option to ship pairs of louver sections pre-assembled together in a common frame. This arrangement reduces installation time and cost (particularly on multi-story buildings) by halving the total number of assemblies that must be lifted into place. Merging pairs of sections is an available option on most Pottorff operable and combination louver models (hurricane-rated and backdraft models are excluded). For these paired louver assemblies, Pottorff includes factory-installed lifting lugs to ease installation and avoid damage to the louvers.

Standard Construction

Material: Extruded aluminum

Frame: 0.081"(2) thick channel

Finish: To match louver finish


Mullion: Visible mullion with pre-installed seam cover

Lifting lugs: Factory installed

Maximum assembly size: 120" W × 96" H (3048 × 2438)
96" W × 120" H (2438 × 3048)

Options

- Flange or frame closure options ordered for louvers will be installed on the perimeter frame

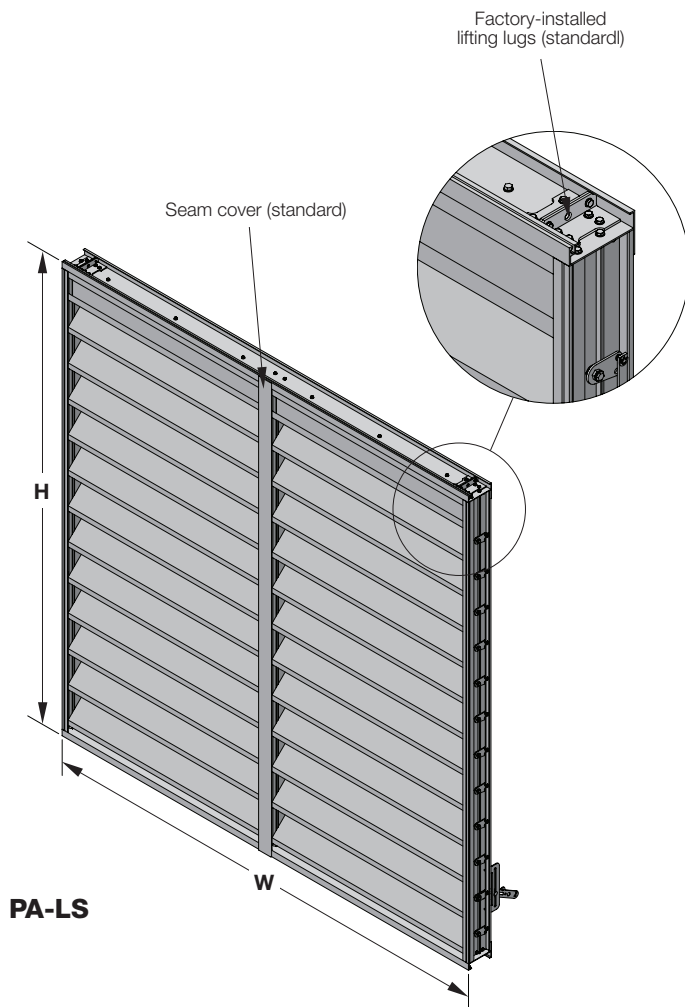

5 year warranty

NOTE: Dimensions in parentheses () are millimeters.
Information is subject to change without notice or obligation.