


Application

The PI-10 indicator switch package employs a single pole double throw micro switch to provide full closed blade indication on curtain style dampers from a remote location. The PI-10 indicator switch package can be factory installed directly to a damper frame, sleeve, or shipped loose for field mounting.

Wiring Diagram

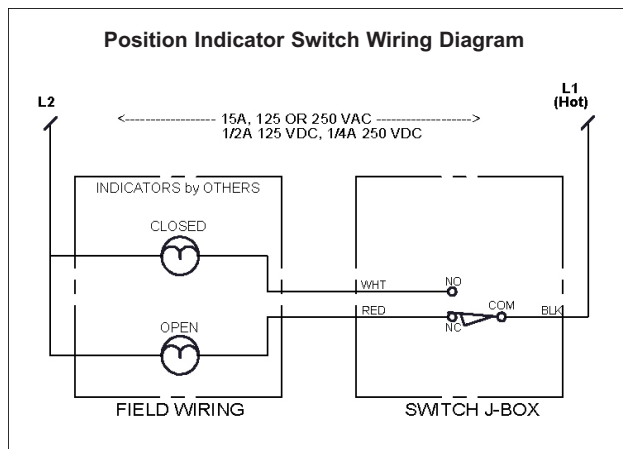

Verify continuity before final wiring.

Ratings


15A/125 or 250 VAC
10A/24 VAC
1.5A/ 124 VDC

Maximum Temperature: -13°F to 176°F (-25°C to 80°C)




Listings


UL 1054 listing: E12252

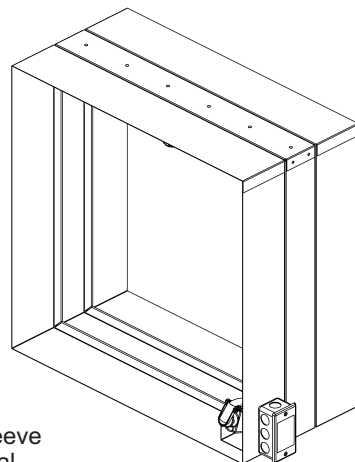


Model **PI-10** (sleeve option), external mount wiring box




PI-10 Ship Loose - Internal Mount

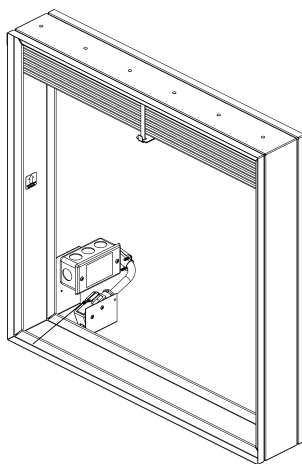

Model **PI-10** (no sleeve)

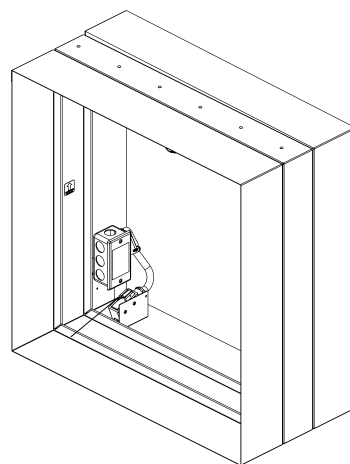

Model **PI-10** (sleeve option), internal mount wiring box



PI-10 Ship Loose - External Mount