

Application

Model PW access panels employ a hinge door panel to provide a convenient and economical means to obtain access to components behind plastered surfaces.

Standard Construction

Frame: 1" x 1³/₄" x 16 ga. (25 x 45 x 1.6) phosphate dipped steel flange with grey prime coat finish - complete with ³/₄" plaster ground.

Door Panel: 14 gauge (2.0) phosphate dipped steel with grey prime coat finish.

Hinge: Concealed – continuous piano type.


Latches: Steel – screwdriver operated cam type.

Minimum Size: 12" x 12" (305 x 305)


Maximum Size: 24" x 24" (610 x 610)

Options

- ☐ Cylinder key lock, flush mounted.
- ☐ 3" (76) wide expansion wings.

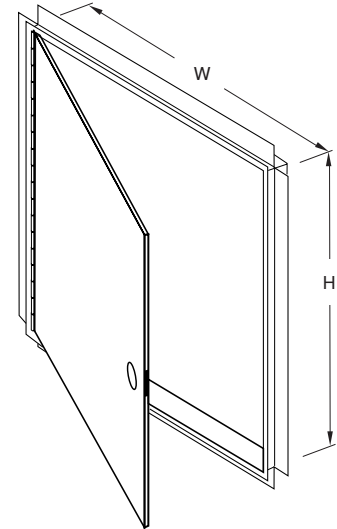

Model **PW**
(standard)

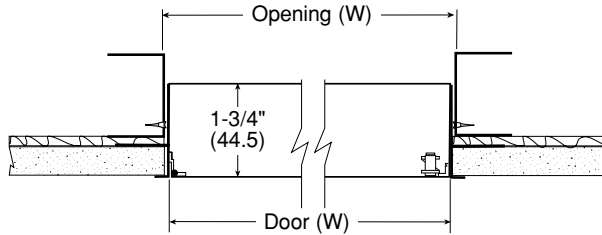

Model **PW** Typical Wall Installation

Door Size W x H	Opening Size W x H	Number of Latches
12" x 12" (305 x 305)	12 ¹ / ₄ " x 12 ¹ / ₄ " (311 x 311)	1
16" x 16" (406 x 406)	16 ¹ / ₄ " x 16 ¹ / ₄ " (413 x 413)	1
16" x 20" (406 x 508)	16 ¹ / ₄ " x 20 ¹ / ₄ " (413 x 514)	1
18" x 18" (457 x 457)	18 ¹ / ₄ " x 18 ¹ / ₄ " (463 x 464)	1
24" x 24" (610 x 610)	24 ¹ / ₄ " x 24 ¹ / ₄ " (616 x 616)	4