

Application

Model RAD duct access doors employ a roll formed door panel to provide a convenient and economical means to obtain access to components in ductwork utilized in low to medium pressure and velocity applications.

Standard Construction

Door Panel: 16 gauge (1.6) galvanized steel.


Hinge: Galvanized – continuous piano type.

Gasket: 1" wide x 1/8" thick (25 x 3.2) closed cell neoprene – door panel to duct.

Latches: Plated steel – 2 pull and catch type with catch plates supplied loose for field installation.

Minimum Size: 5" Ø (127 Ø)

Maximum Size: 24" Ø (610 Ø)

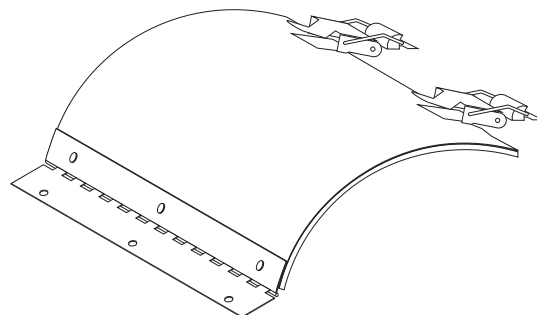

Model **RAD** (standard)
(catch plates supplied loose
for field installation)

Options

☐ Type 304 stainless steel construction.

Duct Diameter	Door Panel Size (W x H)	Duct Opening Size (W x H)
6" (152)	7" x 5" (178 x 127)	6" x 4" (152 x 102)
8" (203)	9" x 8" (229 x 203)	8" x 7" (203 x 178)
10" (254)	11" x 9" (279 x 229)	10" x 8" (254 x 203)
12" (305)	13" x 10" (330 x 254)	12" x 9" (305 x 229)
14" (356)	15" x 13" (381 x 330)	14" x 12" (356 x 305)
16" (406)	17" x 13" (432 x 330)	16" x 12" (406 x 305)
18" (457)	19" x 15" (483 x 381)	18" x 14" (457 x 356)
20" (508)	19" x 17" (483 x 432)	18" x 16" (457 x 406)
24" (610)	20" x 17" (508 x 432)	19" x 16" (483 x 406)