

Application

The VT-250 equipment screen incorporates a vertical "T" blade to match common building cladding systems and screen equipment from line-of-sight. The VT-250 is available in a wide array of finishes including custom color matching.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum.

Frame: 2" x 1 1/2" x 0.081" thick (51 x 38 x 2) angle.

Blades: 0.081" (2) thick vertical cladding T-style.

Mullion: Visible.

Minimum Size: 12" x 12" (305 x 305)


Maximum Size: Single section: 72" x 144" (1829 x 3658)
144" x 72" (3658 x 1829)
Multiple section: Unlimited

Options

- ☐ Factory finish:
 - ☐ High Performance Fluoropolymer - 100% resin Newlar®/ 70% resin Kynar®
 - ☐ Baked Enamel
 - ☐ Clear or Color Anodized, Class 1
 - ☐ Prime Coat
- ☐ Welded construction.
- ☐ Hinged frame.


Ratings

Free Area: [48" x 48" (1219 x 1219) unit]: 3.9 ft² (0.36 m²)
24.4%

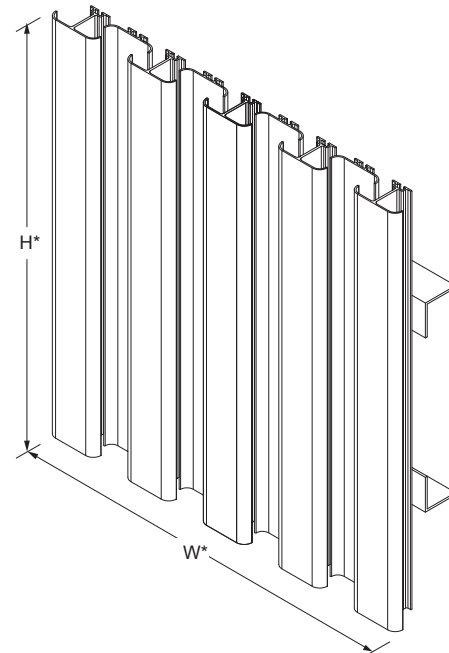


Model **VT-250**
(standard)


*Dimensions furnished
approximately 1/2" (13) undersize.

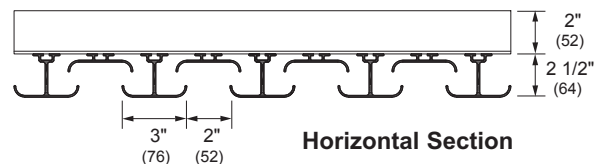

Horizontal Section



Vertical Mullion
(standard)

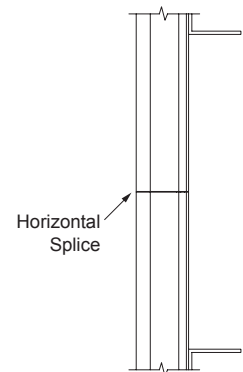

Horizontal Mullion
(standard)