

Application

The CRB-24 ceiling radiation damper accessory is 3 hour rated for use in 1, 2 or 3 hour assemblies. For field installation on the back of steel 'lay-in' diffusers, or tapered neck diffusers in hard ceiling applications.

Standard Construction

Material: CRB-24 - 1/10" (2.55) thick, 8 pound density (128 kg/m²) ceramic fiber.

Blanket: 24" x 24" (610 x 610) face size thermal blanket for use with U.L. classified ceiling fire dampers.

Options

- ☐ Bulk rolls for field sizing or inventory needs.
- ☐ CRB-125 - 24" x 125' (610 x 38, 100) ceramic thermal blanket.

Ratings

UL 555C Fire Resistance Rating: 3 hour (horizontal, for use in 1, 2 or 3 hour rated assemblies)

Listings


UL 555C listing: R14980

CSFM listing: 3225-1404:101

Warnock Hersey listing #: WHI-495-PSH-0177, -0178

Meets NFPA Standards: 90A

Meets Building Code Standards: IBC, NBC, NFPA, SBC and UBC

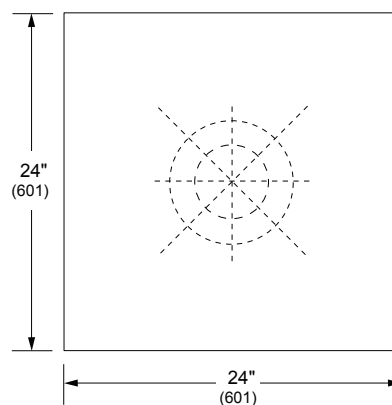

Model **CRB-24**