

Application

Model WAD walk-in access doors employ an extruded aluminum flanged frame and insulated door panel to provide a convenient and economical means to obtain access to components in ductwork and plenums rated for pressures up to 4.5" w.g.

Standard Construction

Frame: Mill finish extruded aluminum (14 gauge equivalent).

Door Panel: 24 gauge (0.51) galvanized steel — double wall, insulated

Insulation: 1" (25) thick fiberglass.

Hinge: Zinc plated steel, full height - piano type.


Gasket: Compressible synthetic closed cell neoprene — door to frame.

Latches: Handles interior and exterior.

Sizes: See chart for available sizes.

Options

- ☐ Round plexiglass viewport.
- ☐ Type 304 stainless steel construction.

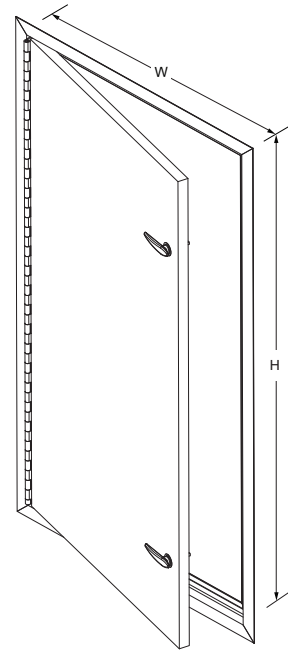

Model **WAD**
(standard)

Size Table

Size (WxH)	Duct Opening (WxH)	Number of Latches
18" x 36"(457 x 914)	18.25" x 36.25"(464 x 921)	2
18" x 48"(457 x 1219)	18.25" x 48.25"(464 x 1226)	2
18" x 54"(457 x 1372)	18.25" x 54.25"(464 x 1378)	3
18" x 60"(457 x 1524)	18.25" x 60.25"(464 x 1530)	3
18" x 72"(457 x 1829)	18.25" x 72.25"(464 x 1835)	2
24" x 36"(610 x 914)	24.25" x 36.25"(616 x 921)	2
24" x 48"(610 x 1219)	24.25" x 48.25"(616 x 1226)	2
24" x 54"(610 x 1372)	24.25" x 54.25"(616 x 1378)	3
24" x 60"(610 x 1524)	24.25" x 60.25"(616 x 1530)	3
24" x 72"(610 x 1829)	24.25" x 72.25"(616 x 1835)	3
30" x 60"(762 x 1524)	30.25" x 60.25"(768 x 1530)	5
30" x 72"(762 x 1829)	30.25" x 72.25"(768 x 1835)	5
30" x 84"(762 x 2134)	30.25" x 84.25"(768 x 2140)	5
30" x 96"(762 x 2438)	30.25" x 96.25"(768 x 2445)	5
36" x 60"(914 x 1524)	36.25" x 60.25"(921 x 1530)	5
36" x 72"(914 x 1829)	36.25" x 72.25"(921 x 1835)	5
36" x 84"(914 x 2134)	36.25" x 84.25"(921 x 2140)	5
48" x 36"(1219 x 914)	48.25" x 36.25"(1226 x 921)	2
48" x 48"(1219 x 1219)	48.25" x 48.25"(1226 x 1226)	5
48" x 54"(1219 x 1372)	48.25" x 54.25"(1226 x 1378)	5
48" x 60"(1219 x 1524)	48.25" x 60.25"(1226 x 1530)	5
48" x 72"(1219 x 1829)	48.25" x 72.25"(1226 x 1835)	5
48" x 84"(1219 x 2134)	48.25" x 84.25"(1226 x 2140)	6
48" x 96"(1219 x 2438)	48.25" x 96.25"(1226 x 2445)	6

